


## REDUCCIONES ASTM A 234 SOLDAR

REDUCCION ASTM A 234							L	Kgr.
DN1	DN2							
3/4"	1/2"					38.1	0,068	
1"	3/4"	1/2"				50.8	0,127	
1.1/4"	1"	3/4"	1/2"			50.8	0,72	
1.1/2"	1.1/4"	1"	3/4"	1/2"		63.5	0,258	
2"	1.1/2"	1.1/4"	1"	3/4"		76.2	0,408	
2.1/2"	2"	1.1/2"	1.1/4"	1"		88.9	0,771	
3"	2.1/2"	2"	1.1/2"	1.1/4"		88.9	1,00	
4"	3.1/2"	3"	2.1/2"	2"	1.1/2"	101.6	1,63	
5"	4"	3.1/2"	3"	2.1/2"	2"	127	2,77	
6"	5"	4"	3.1/2"	3"	2.1/2"	139.7	3,95	
8"	6"	5"	4"	3.1/2"		152.4	6,49	
10"	8"	6"	5"	4"		177.8	10,7	
12"	10"	8"	6"	5"		203.2	15,0	
14"	12"	10"	8"	6"		330.2	26,8	
16"	14"	12"	10"	8"		355.6	33,1	
18"	16"	14"	12"	10"		381	39,9	
20"	18"	16"	14"	12"		508	59,4	
22"	20"	18"	16"	14"		508	65,3	
24"	20"	18"	16"			508	71,7	

Reducción AC Excéntrica

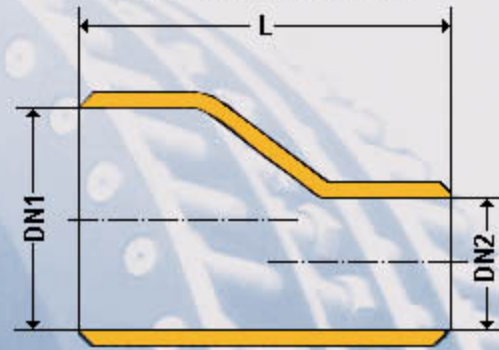

Reducción AC Concéntrica

